




SERVICE CART

ASSEMBLY INSTRUCTIONS




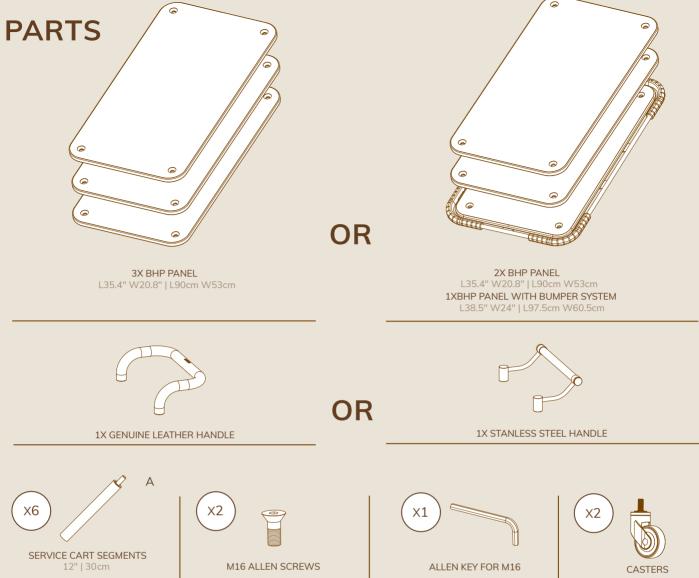





Start by turning one panel on its side Screw the segments and tight the leather handle


*If your cart includes stainless steel handle instead of a leather handle it should look like drawing 1.1

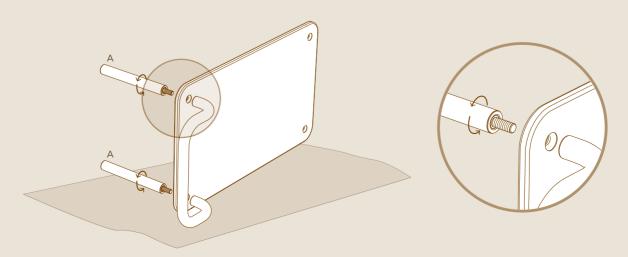

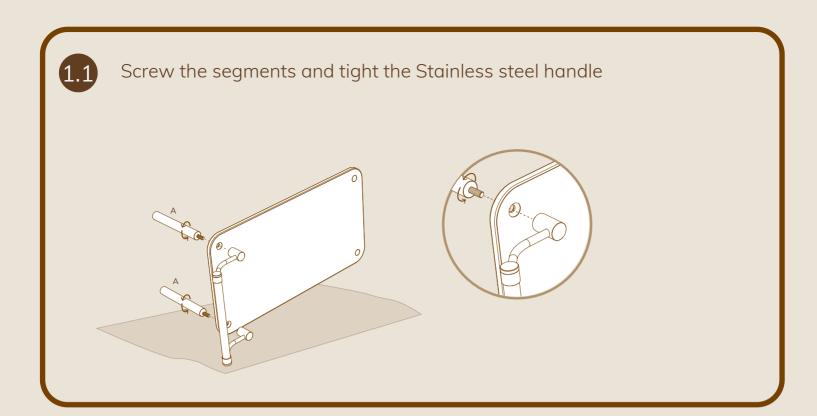

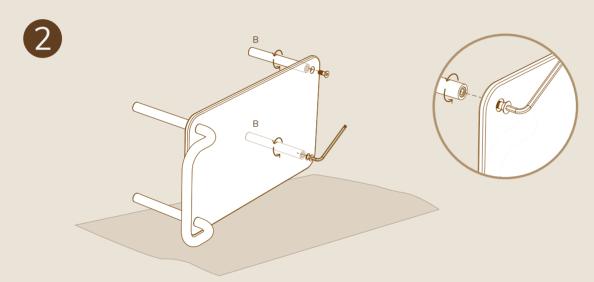

3 Turn the cart upside down.

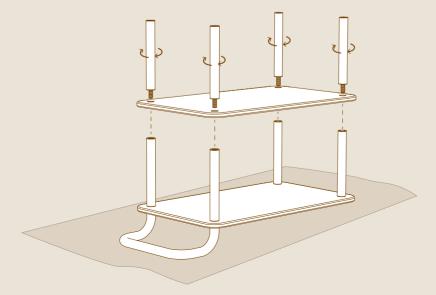

Screw the casters on and tighten them using the flat key. Casters with brakes should be aligned to the handle.

*If your cart includes a bumper system it should look like drawing 4.1

