










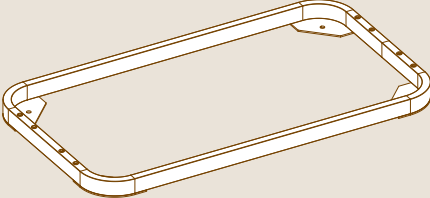



UTILITY
COLLECTION

CLIX LEG TRANSFER AND STORAGE CART

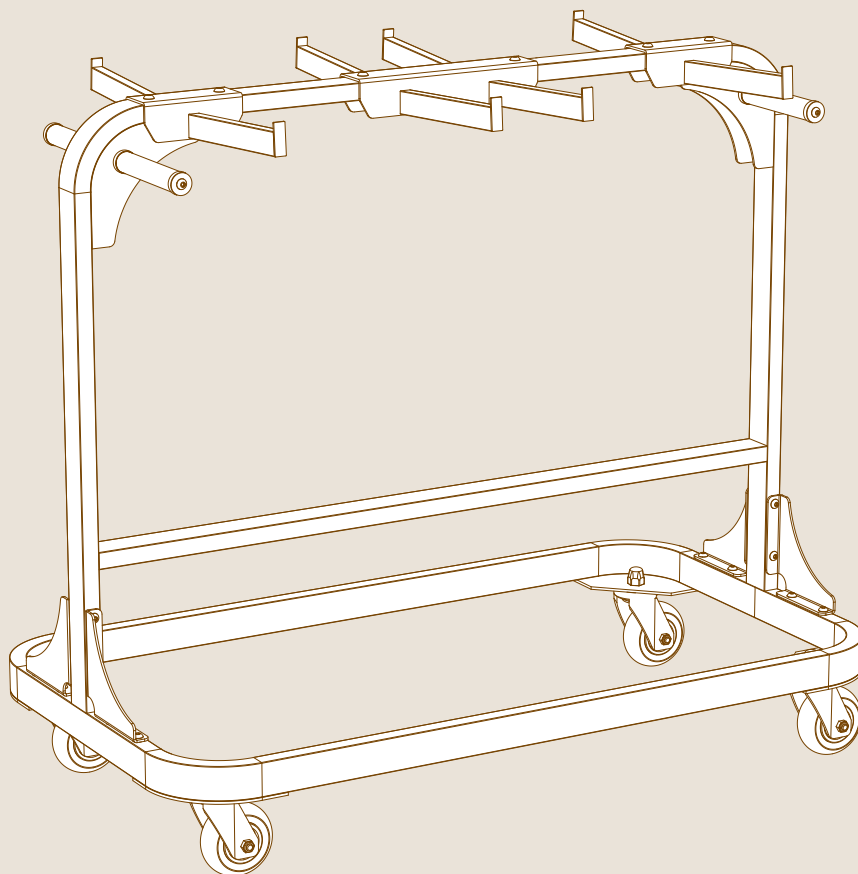


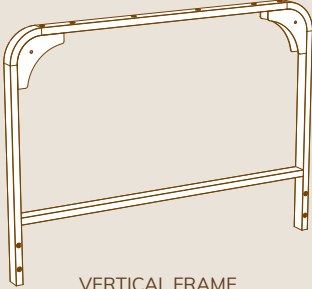PARTS


<div>X1</div>  <div>ALLEN KEY FOR M10 SCREWS</div>	<div>X1</div>  <div>DOUBLE RACK</div>	<div>X2</div>  <div>SINGLE RACK</div>	<div>X1</div>  <div>FLAT KEY</div>
<div>X22</div>  <div>ROUND CAP M10 SCREWS</div>	<div>X1</div>  <div>VERTICAL FRAME</div>	<div>X4</div>  <div>FRAME ANGLES</div>	
<div>X4</div>  <div>SCREW NUTS</div>		<div>X4</div>  <div>HANDLES</div>	
<div>X4</div>  <div>SCREW CAPS</div>	<div>X1</div>  <div>HORIZONTAL FRAME</div>	<div>X4</div>  <div>CASTERS</div>	

ASSEMBLY


1

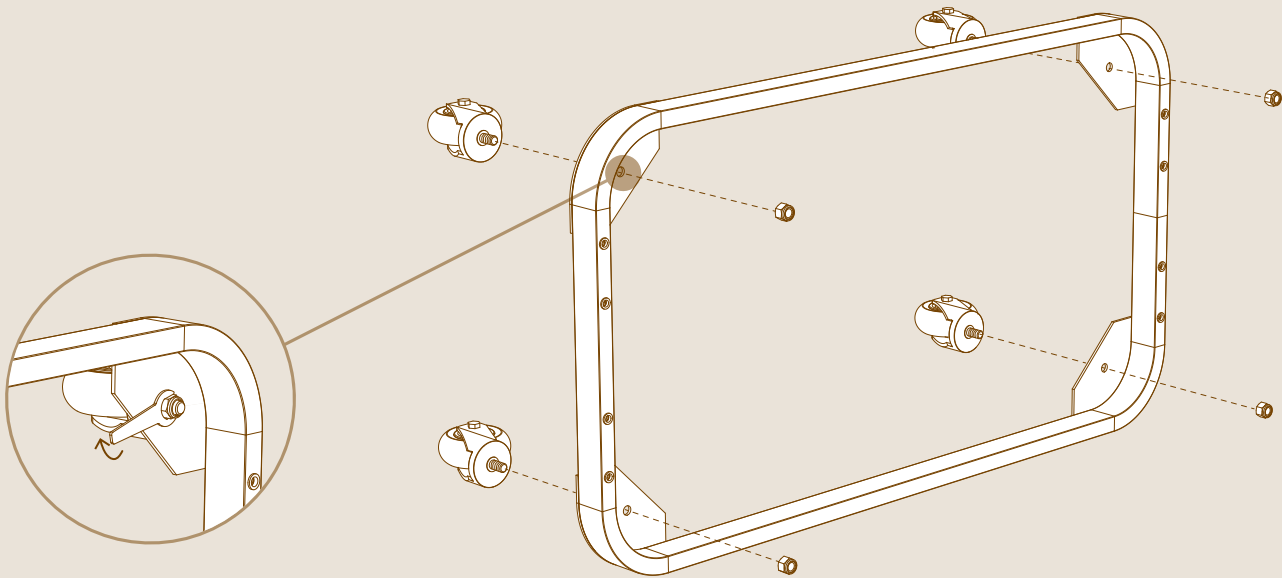

- 2 Keep frame angle screws loose.

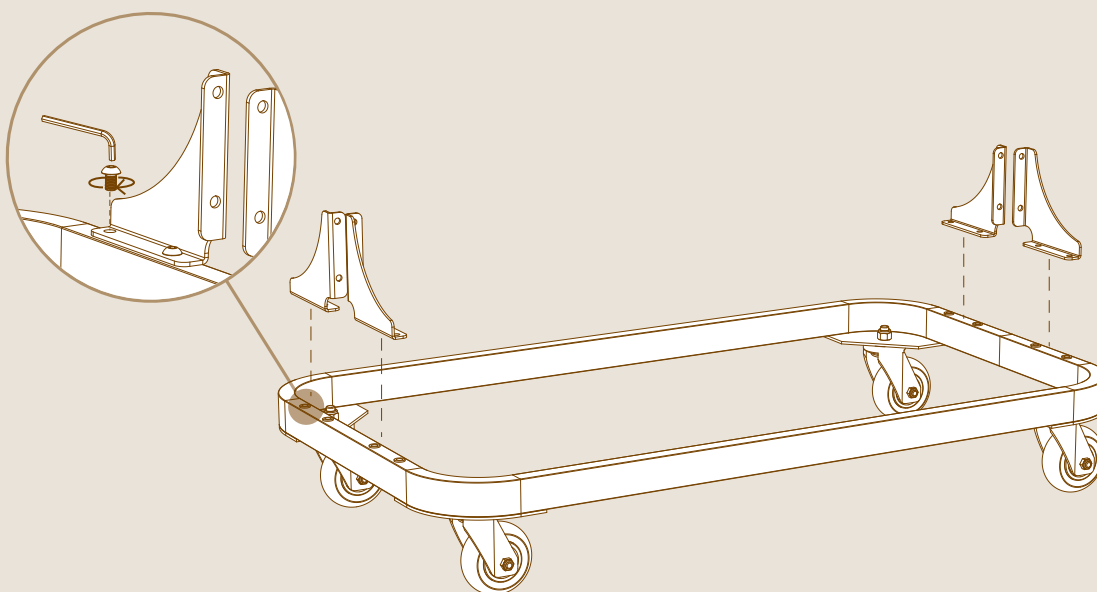


- 3 Adjust 4 frame angles to the vertical frame.

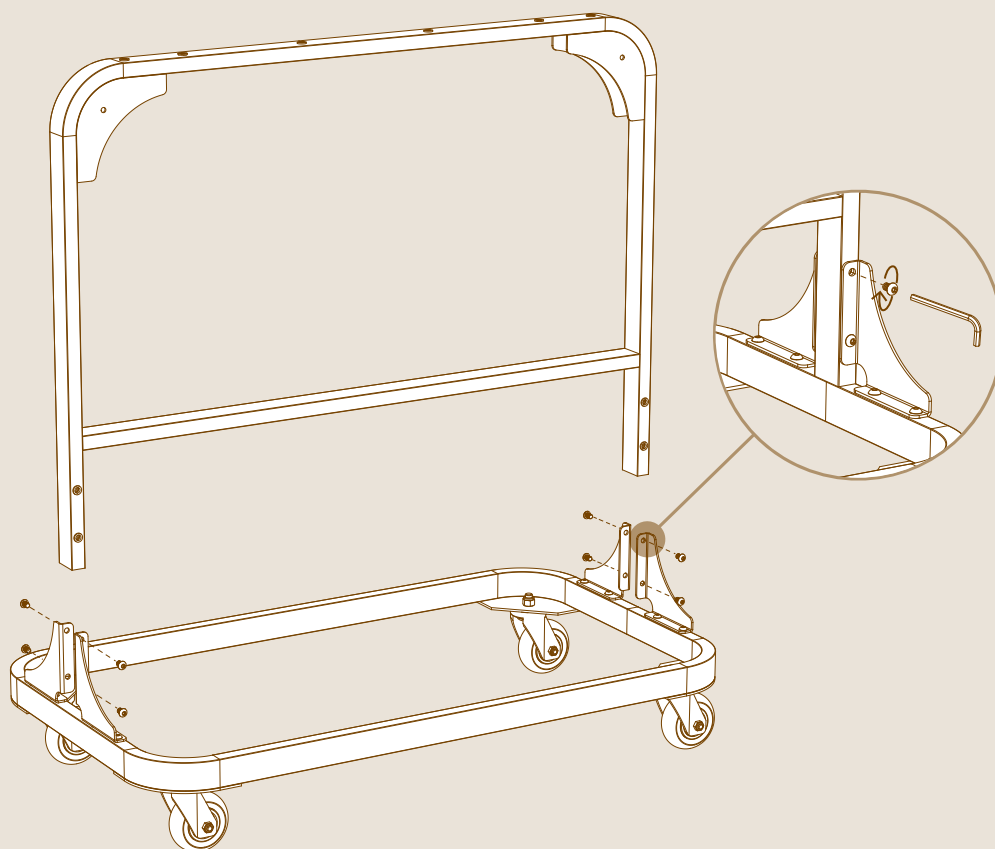


- 4 Tighten all screws.

5

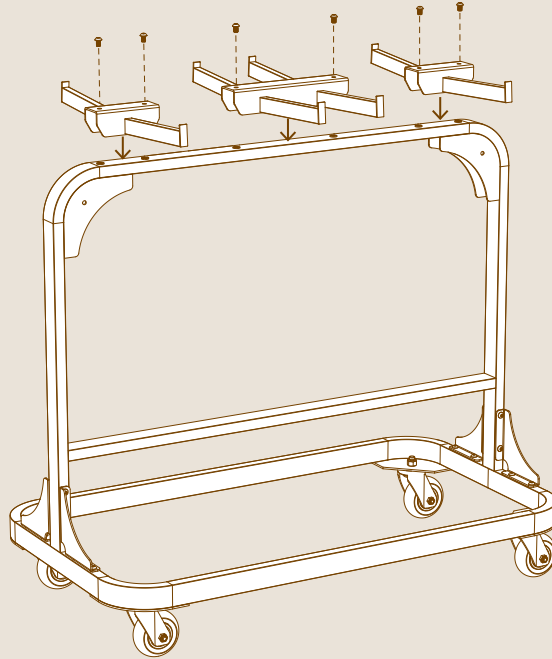


6

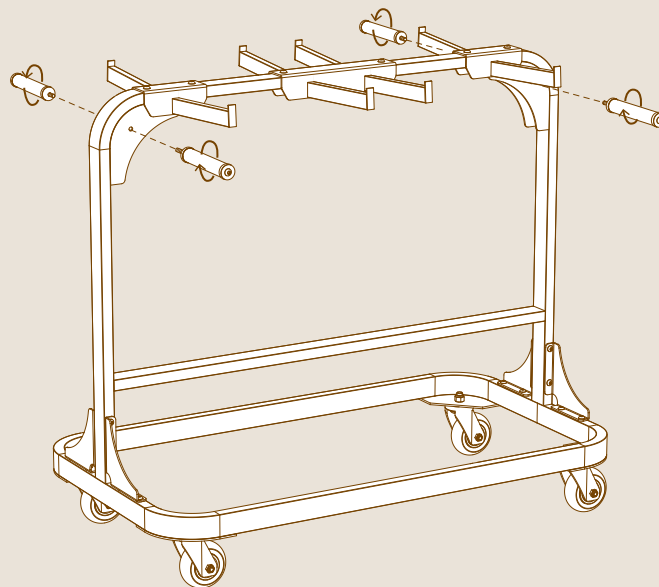

7

Add screw caps on
caster screws.

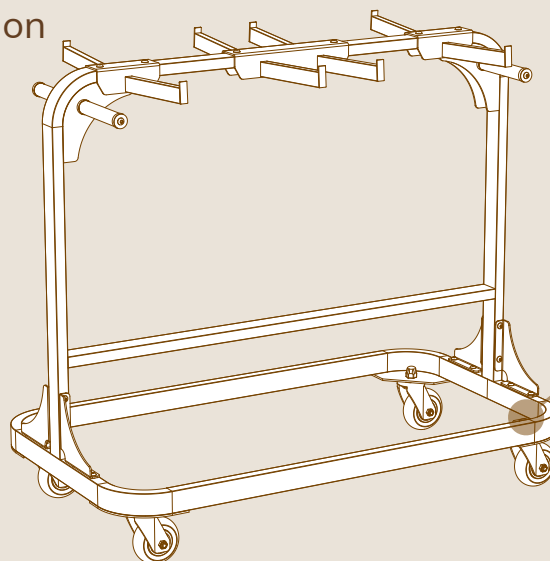

YOUR ALL DONE, WAY TO GO!